


Veneer Drying Line R7

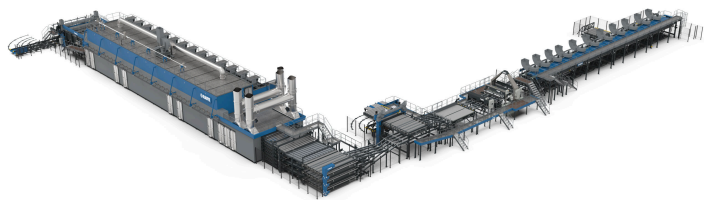

BENEFITS

- Save 15% in energy consumption/m³ produced veneer
- Increase drying capacity by 10%
- Zero emissions of VOC is achieved with R7-series dryers
- Just one operator is needed to run this drying line

TECHNICAL DETAILS

| | |
|---|---------|
| Veneer thickness (mm) | 0,6 - 4 |
| Heat Energy Consumption (KWh/m ³ Dry Veneer) | 400 |
| Stainless Steel Skins | ● |
| Drying Time (min)* | 2.89 |
| Make-up Air Valves | ● |
| Smoke extraction cells | ● |
| Sealant cells | ● |
| Optimized heating system | ● |
| Exhaust Air Blower | ● |
| Misting System | ● |
| Dry veneer capacity* up to (m ³ /h) | 13,6 |
| Installed power (kW) | 595 |
| Operators on the Line (Minimum) | 1 |