Panel Repairing Line R7

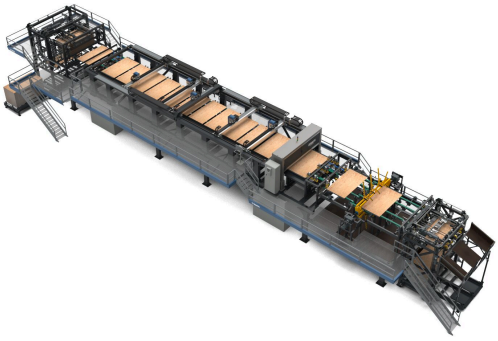

BENEFITS

- High capacity is achieved by repairing the panels while they are moving
- Uses 65% less repairing materials than traditional repairing methods
- One operator needed

TECHNICAL DETAILS

Operators on the Line	1
Minimum Floor space needed (m)	10x30
Panel Thicknesses (mm)	5 - 40
Panel Sizes Variation (ft)	4x4 - 4x8 - 8x13
Repairing Methods	Router-putty-poly
Capacity up to (panels/min)	16