


# Multi-Daylight Panel Overlaying Line R7

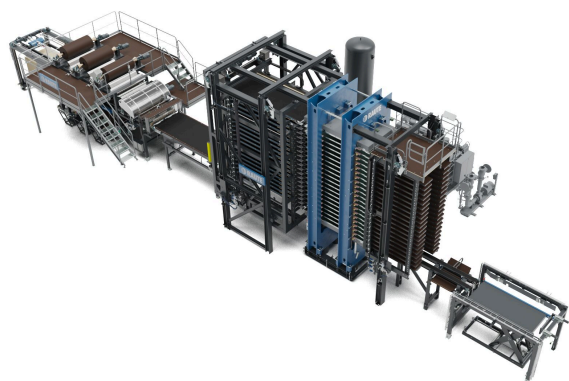

## BENEFITS

- highest capacity with short press cycle time - press open time less than 60 seconds
- Use phenolic, melamine, MDO etc. overlay films in roll or sheet form, up to 3 films on the top and bottom surface
- Suitable for all panel and film sizes
- Only one operator needed
- standardized parts ensure spare part availability, maintenance and support available 24/7

## TECHNICAL DETAILS

Operators on the Line	1
Installed power (kW)	210
Daylight No. (max)	20
Product Thickness Range (mm)	4-50
Press open-time (s)	45-60
Panel feeding	Automatic