


Multi-Daylight Panel Overlaying Line R7

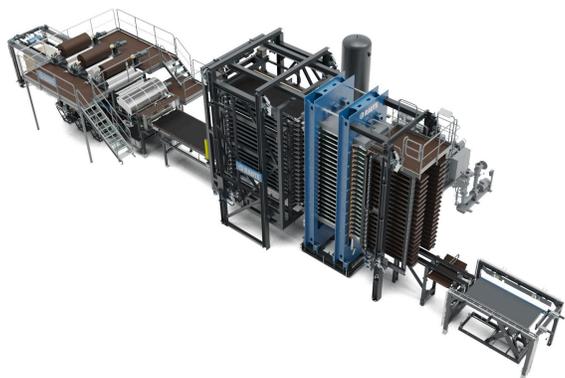

BENEFITS

- highest capacity with short press cycle time - press open time less than 60 seconds
- Use phenolic, melamine, MDO etc. overlay films in roll or sheet form, up to 3 films on the top and bottom surface
- Suitable for all panel and film sizes
- Only one operator needed
- standardized parts ensure spare part availability, maintenance and support available 24/7

TECHNICAL DETAILS

| | |
|------------------------------|-----------|
| Operators on the Line | 1 |
| Installed power (kW) | 210 |
| Daylight No. (max) | 20 |
| Product Thickness Range (mm) | 4-50 |
| Press open-time (s) | 45-60 |
| Panel feeding | Automatic |