


# Short Cycle Panel Overlaying Line R5

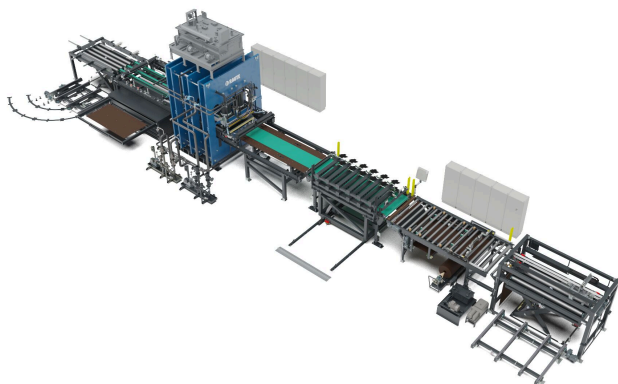

## BENEFITS

- good capacity with short press cycle time - press open time less than 15 seconds
- Use phenolic, melamine, MDO etc. overlay films in roll or sheet form
- Suitable for all panel and film sizes
- standardized parts ensure spare part availability, maintenance and support available 24/7

## TECHNICAL DETAILS

Operators on the Line	1-2
Installed power (kW)	140
Daylight No. (max)	1
Product Thickness Range (mm)	6.5-40
Press open-time (s)	9-15
Panel feeding	Automatic/Manual