


# Short Cycle Panel Overlaying Line R7

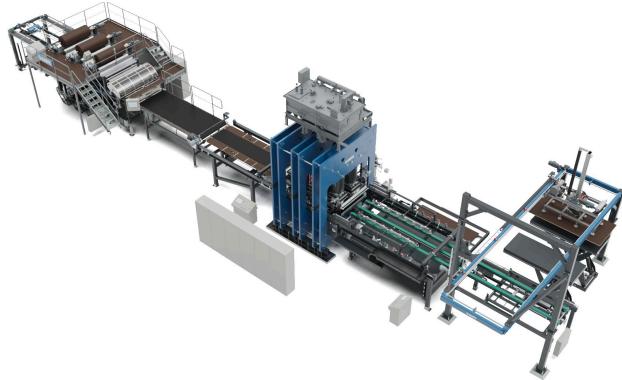

## BENEFITS

- high capacity with short press cycle time - open time less than 15 seconds
- Use phenolic, melamine, MDO etc. overlay films in roll or sheet form
- up to 6 carriages for film rolls, with up to 3 films on the top and bottom surfaces
- Suitable for all panel and film sizes, and coating particle board
- standardized parts ensure spare part availability, maintenance and support available 24/7

## TECHNICAL DETAILS

Operators on the Line	1
Installed power (kW)	150
Daylight No. (max)	1
Product Thickness Range (mm)	6.5-40
Press open-time (s)	9-15
Panel feeding	Automatic