
Panel Repairing Line R7

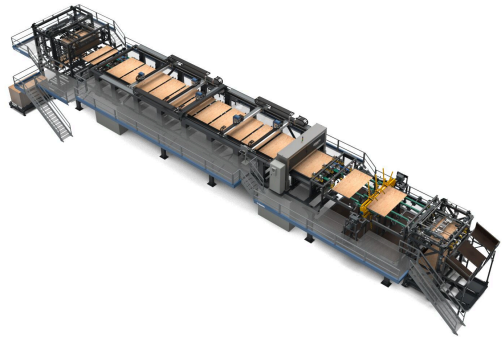

BENEFITS

- High capacity is achieved by repairing the panels in the uniform repairing area
- Uses 65% less repairing materials than traditional repairing methods
- One operator needed to control the machine which saves time and costs
- Efficiency achieved in turning around panels so both sides are fixed

TECHNICAL DETAILS

Operators on the Line	1
Minimum Floor space needed (m)	10x30
Panel Thicknesses (mm)	5–40
Panel Sizes Variation (ft)	4x4, 4x8, 8x13
Repairing Methods	Router, Polyurethane, Putty
Capacity up to (panels/min)	16