


Veneer Drying Line R3

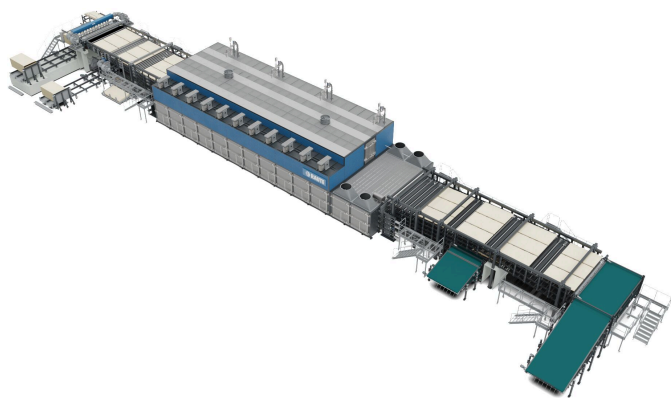

BENEFITS

- Optimal drying saves 20% in energy
- Save 30% in floor area compared to traditional 4-deck dryer
- Save 80% in labor compared to natural veneer drying
- Drying full-size sheets improves recovery by 15%

TECHNICAL DETAILS

| | |
|---|------|
| Operators on the Line | 4 |
| Heat Energy Consumption (KWh/m3 Dry Veneer) | 406 |
| Drying Time (min)* | 3.20 |
| Dry veneer capacity* up to (m3/h) | 9,5 |
| Installed power (kW) | 300 |