


Veneer Peeling Line R3

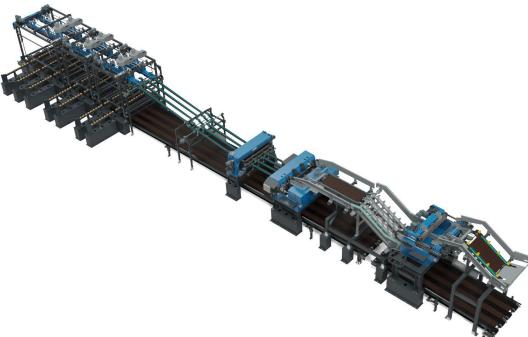

BENEFITS

- Enables efficient veneer peeling from small diameter blocks starting from 80 mm
- 100% electrically operated
- 0.1 mm thickness tolerance
- Nordic design
- Runs typically with two operators

TECHNICAL DETAILS

| | R3-4ft | R3-5ft | R3-8ft |
|------------------------------------|------------------------|------------------------|------------------------|
| Veneer thickness (mm) | 1,1 – 3,6 | 1,1 – 3,6 | 1,1 – 3,6 |
| Block Diameter (mm) | 80 - 350 | 80 - 350 | 80 - 450 |
| Minimum Core Diameter (mm) | 30 | 30 | 35 |
| Peeling Speed Up to (m/min) | 120 | 120 | 120 |
| Block Centering | Spindleless Roundup | Spindleless Roundup | Spindleless Roundup |
| Peeling Method | Spindleless | Spindleless | Spindleless |
| Knife Change | Manual | Manual | Manual |
| Operators on the Line | 1-2 | 1-2 | 1-2 |
| Capacity up to (m ³ /h) | 12 | 15 | 25 |
| Block Cycle time up to (pcs) | 6 | 6 | 6 |
| Block length nom. (ft) | 3-4 | 4-5 | 6 - 8 |

| | | | |
|----------------------|---|---|---|
| Powered Roller Bar |  |  |  |
| Installed power (kW) | 100 | 120 | 160 |