


# Veneer Peeling Line R3



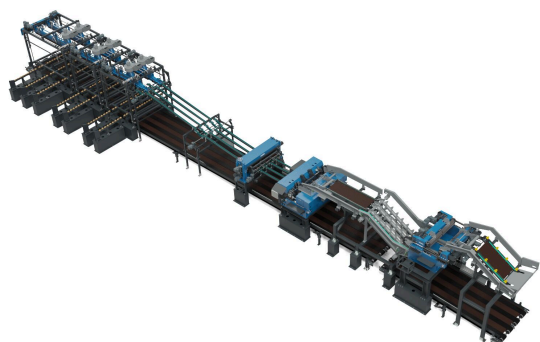


## BENEFITS

- Enables efficient veneer peeling from small diameter blocks starting from 80 mm
- 100% electrically operated
- 0.1 mm thickness tolerance
- Nordic design
- Runs typically with two operators

## TECHNICAL DETAILS

	R3-4ft	R3-5ft	R3-8ft
Veneer thickness (mm)	1,1 – 3,6	1,1 – 3,6	1,1 – 3,6
Block Diameter (mm)	80 - 350	80 - 350	80 - 450
Minimum Core Diameter (mm)	30	30	35
Peeling Speed Up to (m/min)	120	120	120
Block Centering	Spindleless Roundup	Spindleless Roundup	Spindleless Roundup
Peeling Method	Spindleless	Spindleless	Spindleless
Knife Change	Manual	Manual	Manual
Operators on the Line	1-2	1-2	1-2
Capacity up to (m <sup>3</sup> /h)	12	15	25
Block Cycle time up to (pcs)	6	6	6
Block length nom. (ft)	3-4	4-5	6 - 8

Powered Roller Bar			
Installed power (kW)	100	120	160