


# Panel Repairing Line R7

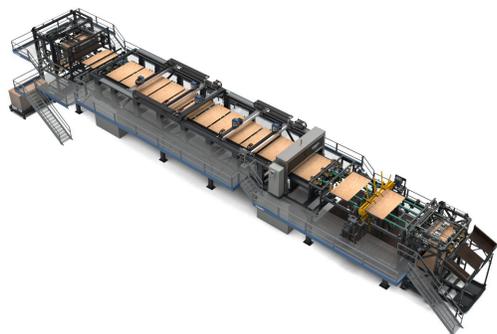

## BENEFITS

- High capacity is achieved by repairing the panels while they are moving
- Uses 65% less repairing materials than traditional repairing methods
- One operator needed

## TECHNICAL DETAILS

|                                |                   |
|--------------------------------|-------------------|
| Operators on the Line          | 1                 |
| Minimum Floor space needed (m) | 10x30             |
| Panel Thicknesses (mm)         | 5 - 40            |
| Panel Sizes Variation (ft)     | 4x4 - 4x8 - 8x13  |
| Repairing Methods              | Router-putty-poly |
| Capacity up to (panels/min)    | 16                |