


Veneer Strength Analyzer R7 - Drying

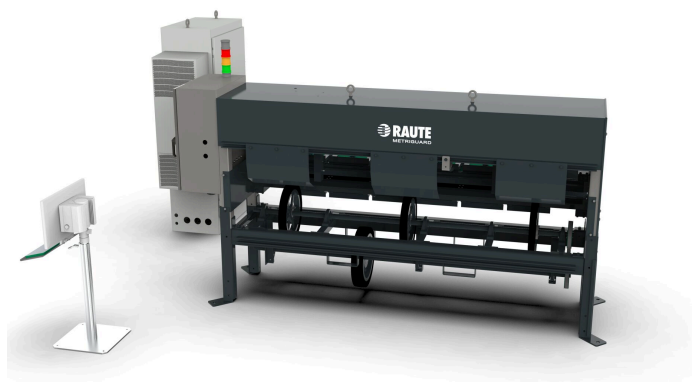

Perfect solution for strength grading dry veneer to ensure the quality of the end product.

BENEFITS

- Optimize LVL and plywood structures
- Produce high-quality structural plywood
- More efficient use of raw material
- Increase profits

TECHNICAL DETAILS

	MOE	Sonic Velocity
Veneer thickness (mm)	0.5 – 4.2	0.5 – 4.2
Available sizes (ft)	5 - 10	5 - 10
Grading accuracy	>95%	>95%
Moisture Range (mc)	1% - 30%	
Moisture Accuracy (mc)	±2.5%	
Moisture and density sensors (pcs)	6 - 10	
Thickness Accuracy (mm)	±0.5	±0.5
Density range (kg/m ³)	300-1500	
Density accuracy (kg/m ³)	±10%	
Sonic Wheels (pcs)	2-3	2-3
Sonic Accuracy (mm/s)	±3%	±3%
Modulus of Elasticity (E)	±15%	